

Energy density and ultra-fast charging.

The RLS25.6-120 is a 25.6 V, 120 Ah (20-hour rate) LiFePO4 lithium battery from the Rekoser Lithium Standard series. It measures 484 × 170 × 241 mm and weighs 21 kg, with M8 terminals. It stores 2.56 kWh and delivers up to 100 A. Energy density and ultra-fast charging. Typical applications: Solar/Wind Energy Systems, Telecommunications and Base Stations, UPS and Data Centers and Light Electric Vehicles.

Formerly RKL25.6-120.

Nominal Voltage	25.6 V
Capacity (25°C)	120 Ah (C20)
Energy	2560 Wh
Weight	21 kg
Terminal	M8
Dimensions	484 × 170 × 241 mm

MAIN ADVANTAGES

- ✓ **Drop-in replacement:** Takes the place of a lead-acid battery
- ✓ **Cycle life:** Up to 20 times more cycles than lead
- ✓ **Light:** 60% less weight
- ✓ **Built-in BMS:** Protection and ultra-fast charging

10
YEARS

LONG LIFE DESIGN

5
YEARS

WARRANTY

* Subject to charge and temperature parameters stipulated in this datasheet.

MAIN APPLICATIONS



SOLAR/WIND ENERGY
SYSTEMS



TELECOMMUNICATIONS
AND BASE STATIONS



UPS AND DATA CENTERS



LIGHT ELECTRIC VEHICLES

QUALITY STANDARDS

CE CERTIFIED


ISO 9001 / 14001

IEC62133


RoHS

GRAPHICS (25°C)


RATE DISCHARGE CHARACTERISTICS 25°C

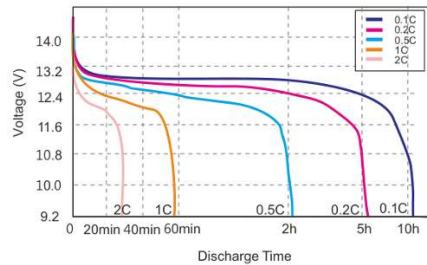


TEMPERATURE DISCHARGE CHARACTERISTICS 25°C

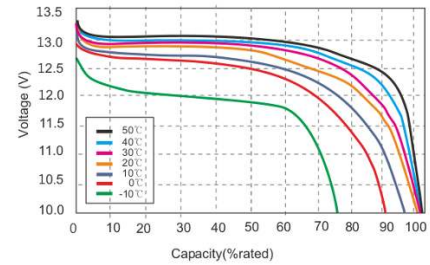


STATE OF CHARGE CURVE

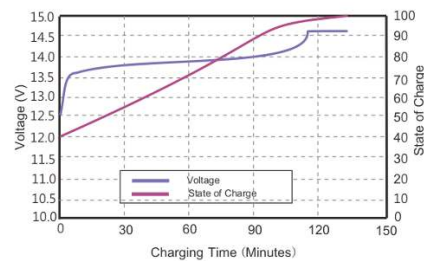


CHARGING CHARACTERISTICS

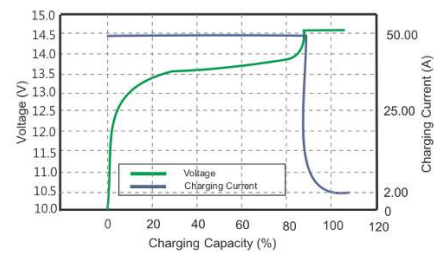

CYCLE LIFE CURVE

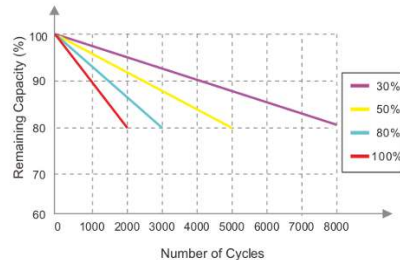

SELF-DISCHARGE CHARACTERISTICS

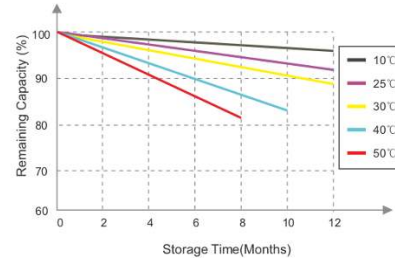

SPECIFICATIONS

Nominal Voltage	25.6 V
Capacity (25°C)	120 Ah (C20)
Energy	2560 Wh
Charge Voltage (25°C)	Cycle use: 29.2±0.2V
Charge Mode	0.2C to 29.2V, then 29.2V,charge current to 0.02C (CC/CV)
Charger Current	20A
Charge Cut-off Voltage	31.2V±0.2V
Max. Charge Current	50 A
Continuous Discharge Current	50A
Max. Discharge Current	100 A (<3s)
Discharge Cut-off Voltage	20V
Internal Resistance	20 mΩ
Self Discharge	3 % of capacity per month at 25 °C
Efficiency of Charge	100% @0.5C
Efficiency of Discharge	96~99% @1C
Cycle Life	>2000 cycles @1C 100%DOD
Protocol (optional)	SMBus/RS485/RS232
SOC (optional)	LED
Water Dust Resistance	IP56

CONSTRUCTION

Component	Material
Container	ABS (Flame Retardant Optional)
Cover	ABS (Flame Retardant Optional)
Sealant	Epoxy Resin
Terminal	Copper

QUICK INSTALLATION GUIDE

To ensure optimal performance and maximize the lifespan of your **REKOSER RLS25.6-120** battery, follow these assembly and connection guidelines.

1. SPACE AND DIMENSION VERIFICATION

Before proceeding, ensure the receptacle or cabinet of your equipment complies with the unit's physical measurements:


Length: 484 mm

Width: 170 mm

Height: 241 mm

Total Height: 241 mm

Weight: 21 kg

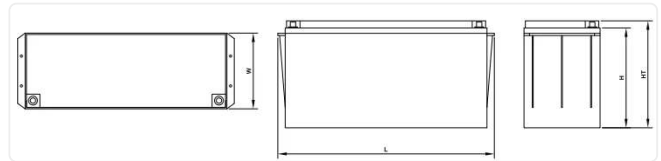

2. TERMINAL CONFIGURATION (M8)

Terminals: Ensure your system's connectors match the M8 type to prevent electrical arcing.

Polarity: Check the positive and negative markings on the battery before connecting, to prevent short circuits.

3. CHARGE PARAMETERS

Cycle use: $29.2 \pm 0.2V$

Maximum Current: Do not exceed 50 A of charge.

4. SAFETY AND STORAGE

Maintenance: Maintenance-free. The built-in BMS protects the battery.

Charging: Use a LiFePO4 charger at the stated voltage; do not charge below 0 °C.

Storage: Store at partial charge, in a cool and dry place.

NEARBY MODELS

RLS25.6-20 (25.6 V · 20 Ah) · [See all RLS series models](#)

Specialized Technical Support
<https://rekoser.com> | +34 958 04 29 73