

The energy tank. 20+ years of proven service life.

The ROS12-100 is a 12 V, 100 Ah (10-hour rate) OPzS lead-acid battery from the Rekoser OPzS (Flooded) series. It measures 409 × 176 × 225 mm and weighs 42.5 kg, with F10 terminals. It stores 1.2 kWh and delivers up to 800 A. The energy tank. 20+ years of proven service life. Typical applications: Solar/Wind Energy Systems, Electrical Substations, Telecommunications and Base Stations and Railway Signaling and Infrastructure.

Formerly RKS12-100.

MAIN ADVANTAGES

- ✓ **Technology:** Vented tubular plates with liquid electrolyte
- ✓ **Maintenance:** Periodic topping up with distilled water required
- ✓ **Durability:** Over 20 years proven design life at 20°C
- ✓ **Control:** Transparent container for easy electrolyte level monitoring



Nominal Voltage	12 V
Capacity (25°C)	100 Ah (C10)
Energy	1200 Wh
Weight	42.5 kg
Terminal	F10
Dimensions	409 × 176 × 225 mm

20
YEARS

LONG LIFE DESIGN

* EUROBAT CLASSIFICATION: >12 Years (Very Long Life).

2
YEARS

WARRANTY

* Subject to charge and temperature parameters stipulated in this datasheet.

MAIN APPLICATIONS



SOLAR/WIND ENERGY SYSTEMS



ELECTRICAL SUBSTATIONS



TELECOMMUNICATIONS AND BASE STATIONS



RAILWAY SIGNALING AND INFRASTRUCTURE



MARITIME



UPS AND DATA CENTERS

QUALITY STANDARDS

CE CERTIFIED

ISO 9001 / 14001

IEC 60896-21/22

YD/T1360

BS6290 part 4

DIN40742

GRAPHICS (25°C)


Constant Discharge Ratings (A) at 25°C

F.V / Time	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
10.80 V	91.2A	73.2A	51.1A	24.7A	17.5A	10A	5.4A
10.50 V	96.2A	76A	52.7A	25.5A	18A	10.1A	5.44A
10.20 V	99.6A	77.9A	53.8A	25.7A	18.1A	10.1A	5.47A
9.90 V	103A	80.4A	55.2A	26A	18.4A	10.2A	5.49A
9.60 V	106A	82A	56A	26.2A	18.5A	10.2A	5.5A


Constant Discharge Ratings (W) at 25°C

F.V / Time	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
10.80 V	167W	137W	97W	48.5W	34.4W	19.9W	10.8W
10.50 V	176W	142W	100W	50W	35.5W	20W	10.9W
10.20 V	182W	146W	102W	50.3W	35.7W	20.2W	10.9W
9.90 V	189W	150W	105W	51W	36.2W	20.2W	11W
9.60 V	194W	153W	106W	51.3W	36.4W	20.3W	11W


CHARGE CHARACTERISTICS

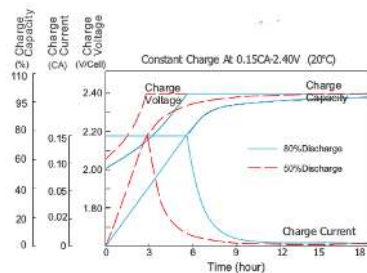


DISCHARGE CHARACTERISTIC 25oC

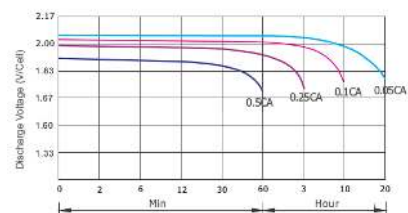


SELF DISCHARGE CHARACTERISTICS

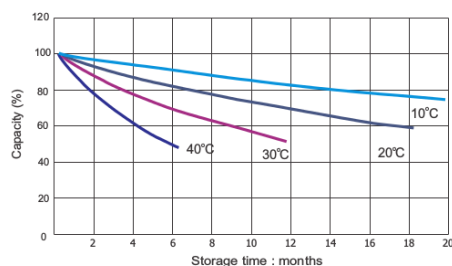

FLOAT VOLTAGE VS FLOAT LIFE

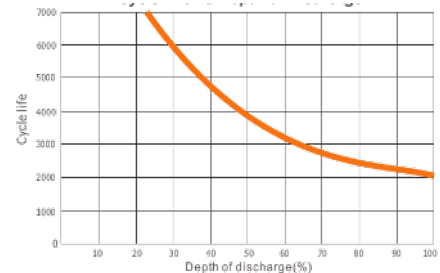

CYCLE DISCHARGE VOLTAGE CURVE (Test standard BS EN 61427:2005)

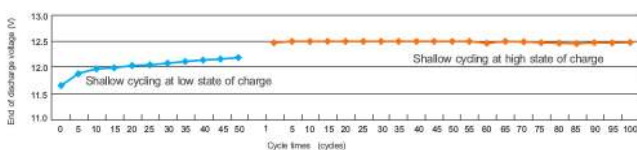

SPECIFICATIONS

Nominal Voltage	12 V
Capacity (25°C)	100 Ah (C10), 108 Ah (C20)
Energy	1200 Wh
Cell number	6
Charge Voltage (25°C)	Cycle use: 14.1-14.4V (-5mV / o C/ cell) Float use: 13.2-13.5V (-3mV / o C/ cell)
Max. Charge Current	20 A
Max. Discharge Current	800 A
Internal Resistance	0.35 mΩ
Self Discharge	3 % of capacity per month at 20 °C
Capacity Affected by Temperature	40 °C: 102 %, 25 °C: 100 %, 0 °C: 85 %, -15 °C: 65 %

CONSTRUCTION

Component	Material
Container	SAN
Cover	ABS (Flame Retardant Optional)
Electrolyte	Sulphuric acid
Negative	Lead
Positive	Lead dioxide
Safety Valve	Rubber
Sealant	Epoxy Resin
Separator	Fibre Glass
Terminal	Copper

QUICK INSTALLATION GUIDE

To ensure optimal performance and maximize the lifespan of your **REKOSER ROS12-100** battery, follow these assembly and connection guidelines.

1. SPACE AND DIMENSION VERIFICATION

Before proceeding, ensure the receptacle or cabinet of your equipment complies with the unit's physical measurements:


Length: 409 mm

Width: 176 mm

Height: 225 mm

Total Height: 225 mm

Weight: 42.5 kg

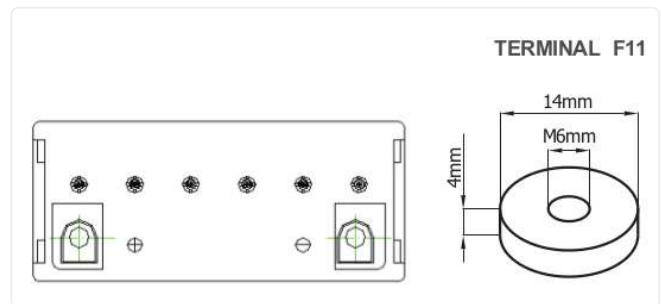

2. TERMINAL CONFIGURATION (F10)

Terminals: Ensure your system's connectors match the F10 type to prevent electrical arcing.

Polarity: Check the positive and negative markings on the battery before connecting, to prevent short circuits.

3. CHARGE PARAMETERS

Cycle use: 14.1-14.4V (-5mV / o C/ cell)

Float use: 13.2-13.5V (-3mV / o C/ cell)

Maximum Current: Do not exceed 20 A of charge.

4. SAFETY AND STORAGE

Maintenance: Check the electrolyte level and top up only with distilled or demineralised water.

Position: Always upright.

Ventilation: Install in a ventilated room: hydrogen is released during charging.

Storage: Store charged, in a cool and dry place, and recharge periodically.

NEARBY MODELS

ROS12-50 (12 V · 50 Ah) · **ROS12-150** (12 V · 150 Ah) · [See all ROS series models](#)

Specialized Technical Support
<https://rekoser.com> | +34 958 04 29 73