

Endurance for frequent charge/discharge cycling.

The RDC12-120 is a 12 V, 120 Ah (10-hour rate) AGM Deep Cycle lead-acid battery from the Rekoser Deep Cycle (AGM) series. It measures 406 × 173 × 227 mm and weighs 34 kg, with F12 terminals. It stores 1.44 kWh and delivers up to 960 A. Endurance for frequent charge/discharge cycling. Typical applications: Solar/Wind Energy Systems and Light Electric Vehicles.

Formerly **RKC12-120**.

Nominal Voltage	12 V
Capacity (25°C)	120 Ah (C10)
Energy	1440 Wh
Weight	34 kg
Terminal	F12
Dimensions	406 × 173 × 227 mm

MAIN ADVANTAGES

- ✓ **Cycling:** Optimized for more than 400 cycles at 80% DOD
- ✓ **Materials:** Specialized active material and thick plates
- ✓ **Versatility:** Suitable for both motive and stationary use
- ✓ **Efficiency:** High recharge acceptance

12
YEARS

LONG LIFE DESIGN

* EUROBAT CLASSIFICATION: 10-12 Years (High Performance).

2
YEARS

WARRANTY

* Subject to charge and temperature parameters stipulated in this datasheet.

MAIN APPLICATIONS



**SOLAR/WIND ENERGY
SYSTEMS**



LIGHT ELECTRIC VEHICLES

QUALITY STANDARDS

CE CERTIFIED

ISO 9001 / 14001

IEC 60896-21/22

JIS C8704

GB/T19639

GRAPHICS (25°C)

Constant Discharge Ratings (A) at 25°C

F.V / Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
11.10 V	189A	169A	154A	108A	69.9A	31A	20.8A	11.7A	6.15A
10.80 V	220A	188A	169A	115A	73.1A	32A	21.3A	12A	6.3A
10.50 V	249A	207A	181A	120A	75.6A	32.7A	21.8A	12.2A	6.42A
10.20 V	287A	222A	195A	124A	77.1A	33.2A	22.1A	12.4A	6.54A
10.02 V	321A	245A	207A	129A	79A	33.6A	22.3A	12.6A	6.7A
9.60 V	360A	266A	219A	135A	81.1A	34A	22.6A	12.7A	6.85A


Constant Discharge Ratings (W) at 25°C

F.V / Time	5MIN	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
11.10 V	355W	321W	294W	208W	136W	60.9W	41.1W	23.4W	12.4W
10.80 V	408W	353W	320W	219W	140W	62.4W	41.8W	23.8W	12.6W
10.50 V	456W	384W	340W	227W	144W	63.1W	42.5W	24.1W	12.7W
10.20 V	518W	408W	362W	233W	146W	63.5W	42.7W	24.3W	12.9W
10.02 V	573W	445W	380W	240W	148W	63.8W	42.8W	24.4W	13.1W
9.60 V	634W	477W	400W	250W	151W	64.2W	43W	24.6W	13.3W

CHARGE CHARACTERISTICS




DISCHARGE CHARACTERISTIC 25oC

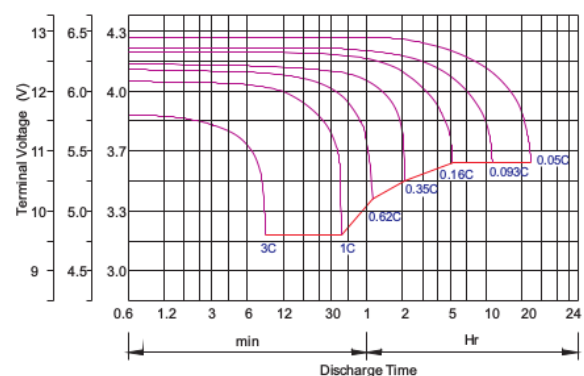

SELF DISCHARGE CHARACTERISTICS



LIFE CHARACTERISTICS OF CYCLIC USE

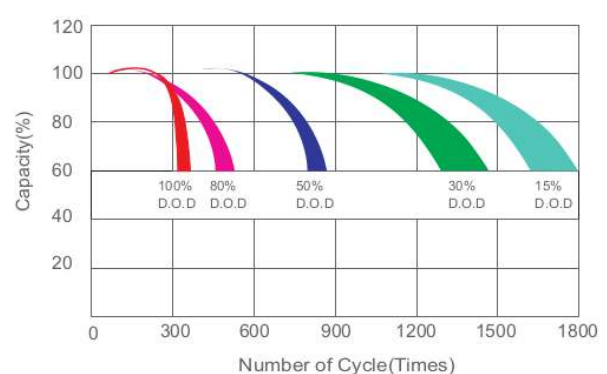

SPECIFICATIONS

Nominal Voltage	12 V
Capacity (25°C)	120 Ah (C10)
Energy	1440 Wh
Cell number	6
Charge Voltage (25°C)	Cycle use: 14.6-14.8V (-30mV/C), max. Current 2.1A Float use: 13.6-13.8V (-20mV/C)
Max. Charge Current	36 A
Max. Discharge Current	960 A
Internal Resistance	25 mΩ
Self Discharge	3 % of capacity per month at 20 °C
Capacity Affected by Temperature	40 °C: 102 %, 25 °C: 100 %, 0 °C: 85 %, -15 °C: 65 %

CONSTRUCTION

Component	Material
Container	ABS (Flame Retardant Optional)
Cover	ABS (Flame Retardant Optional)
Electrolyte	Sulphuric acid
Negative	Lead
Positive	Lead dioxide
Safety Valve	Rubber
Sealant	Epoxy Resin
Separator	Fibre Glass
Terminal	Copper

QUICK INSTALLATION GUIDE

To ensure optimal performance and maximize the lifespan of your **REKOSER RDC12-120** battery, follow these assembly and connection guidelines.

1. SPACE AND DIMENSION VERIFICATION

Before proceeding, ensure the receptacle or cabinet of your equipment complies with the unit's physical measurements:

Length: 406 mm

Width: 173 mm

Height: 227 mm

Total Height: 238 mm

Weight: 34 kg

2. TERMINAL CONFIGURATION (F12)

Terminals: Ensure your system's connectors match the F12 type to prevent electrical arcing.

Polarity: Check the positive and negative markings on the battery before connecting, to prevent short circuits.

3. CHARGE PARAMETERS

Cycle use: 14.6-14.8V (-30mV/C), max. Current 2.1A

Float use: 13.6-13.8V (-20mV/C)

Maximum Current: Do not exceed 36 A of charge.

4. SAFETY AND STORAGE

Maintenance: Sealed AGM technology, maintenance-free and leak-proof.

Cycling: Recharge fully after every discharge; never leave it discharged.

Position: Can be installed in any orientation, except inverted.

Storage: Store charged, in a cool and dry place, and recharge periodically.

NEARBY MODELS

RDC12-100 (12 V · 100 Ah) · **RDC12-134** (12 V · 134 Ah) · [See all RDC series models](#)

Specialized Technical Support

<https://rekoser.com> | +34 958 04 29 73