

The industry standard. The perfect balance between service life and cost.

The RHP12-35 is a 12 V, 35 Ah (10-hour rate) AGM lead-acid battery from the Rekoser High Performance (AGM) series. It measures 195 × 130 × 155 mm and weighs 10.5 kg, with F11 terminals. It stores 420 Wh and delivers up to 350 A. The industry standard. The perfect balance between service life and cost. Typical applications: Telecommunications and Base Stations and UPS and Data Centers.

Formerly **RKE12-35**.

Nominal Voltage	12 V
Capacity (25°C)	35 Ah (C10)
Energy	420 Wh
Weight	10.5 kg
Terminal	F11
Dimensions	195 × 130 × 155 mm

MAIN ADVANTAGES

- ✓ **Service Life:** 10-12 years design life
- ✓ **Grid:** Heavy-duty Pb-Ca-Sn alloy grids
- ✓ **Reliability:** Consistent performance in critical backup
- ✓ **Efficiency:** High gas recombination efficiency

12
YEARS

LONG LIFE DESIGN

* EUROBAT CLASSIFICATION: 10-12 Years (High Performance).

2
YEARS

WARRANTY

* Subject to charge and temperature parameters stipulated in this datasheet.

MAIN APPLICATIONS



**TELECOMMUNICATIONS
AND BASE STATIONS**



UPS AND DATA CENTERS

QUALITY STANDARDS

CE CERTIFIED

ISO 9001 / 14001

GB/T19639

IEC 61056

JIS C8702

GRAPHICS (25°C)


Constant Discharge Ratings (A) at 25°C

F.V / Time	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
10.80 V	61.7A	49.7A	31.3A	19.8A	8.49A	5.94A	3.5A	1.84A
10.50 V	65.4A	52.4A	32.4A	20.4A	8.75A	6.13A	3.52A	1.85A
10.20 V	68.4A	54.3A	33.3A	20.8A	8.81A	6.17A	3.55A	1.86A
10.02 V	71.3A	56.4A	34.3A	21.4A	8.87A	6.21A	3.56A	1.87A
9.60 V	73.5A	57.8A	35A	21.7A	8.93A	6.25A	3.56A	1.87A


Constant Discharge Ratings (W) at 25°C

F.V / Time	10MIN	15MIN	30MIN	1HR	3HR	5HR	10HR	20HR
10.80 V	667W	545W	351W	266W	99.8W	70.2W	41.8W	22.1W
10.50 V	706W	576W	364W	233W	103W	72.4W	42.1W	22.2W
10.20 V	738W	596W	373W	237W	104W	72.9W	42.3W	22.3W
10.02 V	770W	619W	385W	244W	104W	73.4W	42.5W	22.4W
9.60 V	794W	634W	393W	247W	105W	73.8W	42.5W	22.4W


CHARGE CHARACTERISTICS

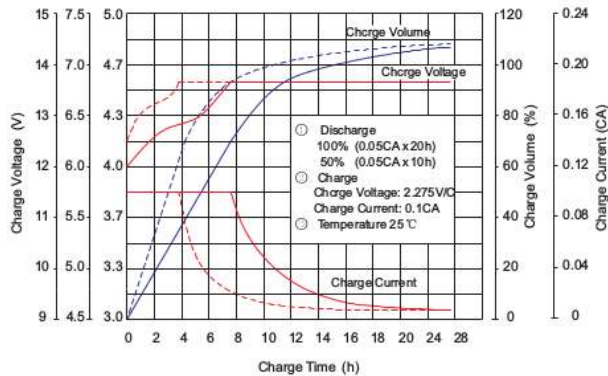


DISCHARGE CHARACTERISTIC 25oC

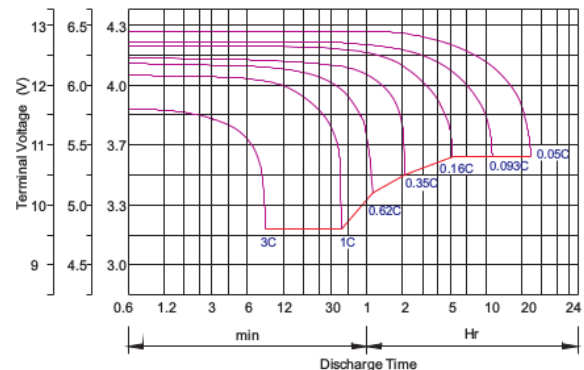

SELF DISCHARGE CHARACTERISTICS

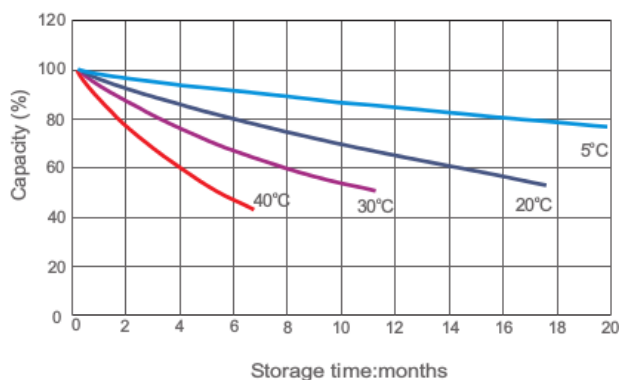

FLOAT VOLTAGE VS FLOAT LIFE

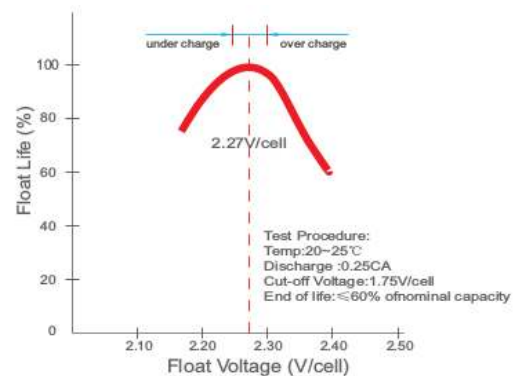

SPECIFICATIONS

Nominal Voltage	12 V
Capacity (25°C)	35 Ah (C10)
Energy	420 Wh
Cell number	6
Charge Voltage (25°C)	Cycle use: 14.6-14.8V (-30mV/C), max. Current 2.1A Float use: 13.6-13.8V (-20mV/C)
Max. Charge Current	10.5 A
Max. Discharge Current	350 A
Internal Resistance	9 mΩ
Self Discharge	3 % of capacity per month at 25 °C
Capacity Affected by Temperature	40 °C: 102 %, 25 °C: 100 %, 0 °C: 85 %, -15 °C: 65 %

CONSTRUCTION

Component	Material
Container	ABS (Flame Retardant Optional)
Cover	ABS (Flame Retardant Optional)
Electrolyte	Sulphuric acid
Negative	Lead
Positive	Lead dioxide
Safety Valve	Rubber
Sealant	Epoxy Resin
Separator	Fibre Glass
Terminal	Copper

QUICK INSTALLATION GUIDE

To ensure optimal performance and maximize the lifespan of your **REKOSER RHP12-35** battery, follow these assembly and connection guidelines.

1. SPACE AND DIMENSION VERIFICATION

Before proceeding, ensure the receptacle or cabinet of your equipment complies with the unit's physical measurements:

Length: 195 mm

Width: 130 mm

Height: 155 mm

Total Height: 168 mm

Weight: 10.5 kg

2. TERMINAL CONFIGURATION (F11)

Terminals: Ensure your system's connectors match the F11 type to prevent electrical arcing.

Polarity: Check the positive and negative markings on the battery before connecting, to prevent short circuits.

3. CHARGE PARAMETERS

Cycle use: 14.6-14.8V (-30mV/C), max. Current 2.1A

Float use: 13.6-13.8V (-20mV/C)

Maximum Current: Do not exceed 10.5 A of charge.

4. SAFETY AND STORAGE

Maintenance: Sealed AGM technology, maintenance-free and leak-proof.

Position: Can be installed in any orientation, except inverted.

Storage: Store charged, in a cool and dry place, and recharge periodically.

NEARBY MODELS

RHP12-33 (12 V · 33 Ah) · **RHP12-36** (12 V · 36 Ah) · [See all RHP series models](#)

Specialized Technical Support
<https://rekoser.com> | +34 958 04 29 73