

Maximum GEL longevity (2V). Deep-cycle endurance for critical infrastructure.

The RXG2-300 is a 2 V, 300 Ah (10-hour rate) GEL Deep Cycle lead-acid battery from the Rekoser eXtended Gel (2V) series. It measures 171 × 151 × 330 mm and weighs 18.5 kg, with F10 terminals. It stores 600 Wh and delivers up to 1500 A. Maximum GEL longevity (2V). Deep-cycle endurance for critical infrastructure. Typical applications: Solar/Wind Energy Systems, Electrical Substations, Telecommunications and Base Stations and UPS and Data Centers.

Formerly **RKG2-300**.

Nominal Voltage	2 V
Capacity (25°C)	300 Ah (C10)
Energy	600 Wh
Weight	18.5 kg
Terminal	F10
Dimensions	171 × 151 × 330 mm

MAIN ADVANTAGES

- ✓ **Recovery:** Superior performance after deep discharges
- ✓ **Stable:** Low electrolyte stratification thanks to eXtended Gel technology
- ✓ **Longevity:** Excellent cyclic life in harsh conditions (Very Long Life >12 years design life)
- ✓ **Gel Tech:** Premium thixotropic gel electrolyte with high thermal stability

15
YEARS

LONG LIFE DESIGN

* EUROBAT CLASSIFICATION: >12 Years (Very Long Life).

2
YEARS

WARRANTY

* Subject to charge and temperature parameters stipulated in this datasheet.

MAIN APPLICATIONS



SOLAR/WIND ENERGY SYSTEMS



ELECTRICAL SUBSTATIONS



TELECOMMUNICATIONS AND BASE STATIONS



UPS AND DATA CENTERS

QUALITY STANDARDS

CE CERTIFIED

ISO 9001 / 14001

IEC61427

IEC 60896-21/22

YD/T1360

BS6290 part 4

GRAPHICS (25°C)


Constant Discharge Ratings (A) at 25°C

F.V / Time	30MIN	1HR	3HR	5HR	10HR	20HR
1.80 V	241A	164A	74.2A	51.8A	30A	15.8A
1.75 V	250A	169A	76.5A	53.4A	30.2A	15.9A
1.70 V	257A	173A	77A	53.8A	30.4A	16A
1.65 V	265A	177A	77.6A	54.1A	30.5A	16A
1.60 V	270A	180A	78A	54.5A	30.5A	16A


Constant Discharge Ratings (W) at 25°C

F.V / Time	30MIN	1HR	3HR	5HR	10HR	20HR
1.80 V	451W	312W	145W	102W	59.7W	31.5W
1.75 V	468W	322W	150W	105W	60.1W	31.7W
1.70 V	480W	328W	151W	106W	60.5W	31.9W
1.65 V	495W	337W	152W	107W	60.7W	32W
1.60 V	505W	342W	153W	107W	60.8W	32.1W


CHARGE CHARACTERISTICS

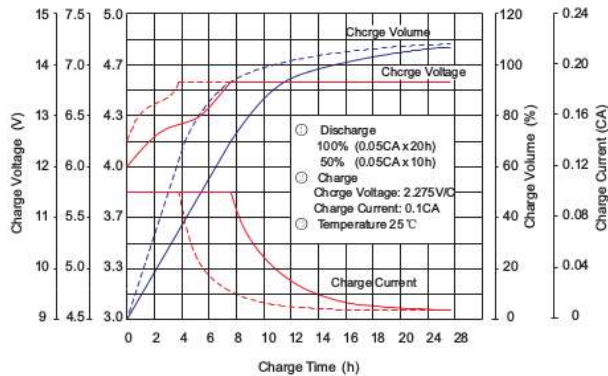


DISCHARGE CHARACTERISTIC 25oC

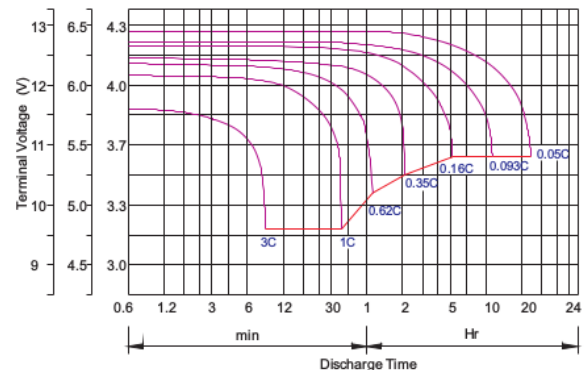

SELF DISCHARGE CHARACTERISTICS

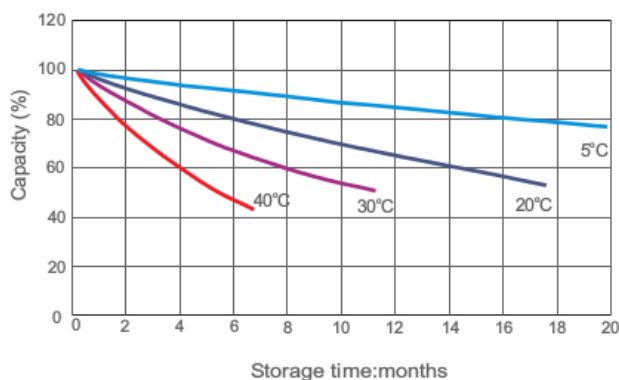

LIFE CHARACTERISTIC OF CYCLIC USE

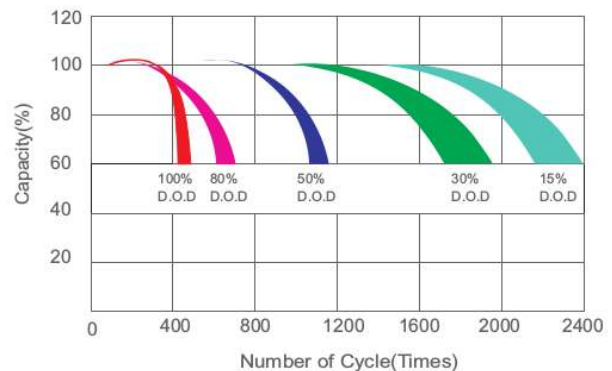

SPECIFICATIONS

Nominal Voltage	2 V
Capacity (25°C)	300 Ah (C10)
Energy	600 Wh
Cell number	1
Charge Voltage (25°C)	Cycle use: 2.35-2.40V (-5mV/C) Float use: 2.25-2.29V (-3mV/C)
Max. Charge Current	60 A
Max. Discharge Current	1500 A
Internal Resistance	25 mΩ
Self Discharge	3 % of capacity per month at 20 °C
Capacity Affected by Temperature	40 °C: 102 %, 25 °C: 100 %, 0 °C: 85 %, -15 °C: 65 %

CONSTRUCTION

Component	Material
Container	ABS (Flame Retardant Optional)
Cover	ABS (Flame Retardant Optional)
Electrolyte	Sulphuric acid
Negative	Lead
Positive	Lead dioxide
Safety Valve	Rubber
Sealant	Epoxy Resin
Separator	Fibre Glass
Terminal	Copper

QUICK INSTALLATION GUIDE

To ensure optimal performance and maximize the lifespan of your **REKOSER RXG2-300** battery, follow these assembly and connection guidelines.

1. SPACE AND DIMENSION VERIFICATION

Before proceeding, ensure the receptacle or cabinet of your equipment complies with the unit's physical measurements:


Length: 171 mm

Width: 151 mm

Height: 330 mm

Total Height: 364 mm

Weight: 18.5 kg

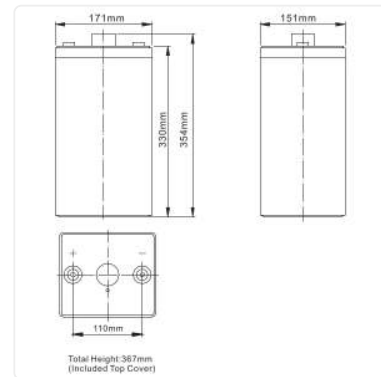

2. TERMINAL CONFIGURATION (F10)

Terminals: Ensure your system's connectors match the F10 type to prevent electrical arcing.

Polarity: Check the positive and negative markings on the battery before connecting, to prevent short circuits.

3. CHARGE PARAMETERS

Cycle use: 2.35-2.40V (-5mV/C)

Float use: 2.25-2.29V (-3mV/C)

Maximum Current: Do not exceed 60 A of charge.

4. SAFETY AND STORAGE

Maintenance: Sealed gel battery, maintenance-free and leak-proof.

Charging: Keep to the stated charge voltage: gel is sensitive to overcharging.

Cycling: Recharge fully after every discharge; never leave it discharged.

Storage: Store charged, in a cool and dry place, and recharge periodically.

NEARBY MODELS

RXG2-250 (2 V · 250 Ah) · **RXG2-400** (2 V · 400 Ah) · [See all RXG series models](#)

Specialized Technical Support
<https://rekoser.com> | +34 958 04 29 73