

Maximum GEL longevity (2V). Deep-cycle endurance for critical infrastructure.

The RXG2-400 is a 2 V, 400 Ah (10-hour rate) GEL Deep Cycle lead-acid battery from the Rekoser eXtended Gel (2V) series. It measures 210 × 176 × 330 mm and weighs 25.5 kg, with F10 terminals. It stores 800 Wh and delivers up to 2000 A. Maximum GEL longevity (2V). Deep-cycle endurance for critical infrastructure. Typical applications: Solar/Wind Energy Systems, Electrical Substations, Telecommunications and Base Stations and UPS and Data Centers.

Formerly **RKG2-400**.

Nominal Voltage	2 V
Capacity (25°C)	400 Ah (C10)
Energy	800 Wh
Weight	25.5 kg
Terminal	F10
Dimensions	210 × 176 × 330 mm

MAIN ADVANTAGES

- ✓ **Recovery:** Superior performance after deep discharges
- ✓ **Stable:** Low electrolyte stratification thanks to eXtended Gel technology
- ✓ **Longevity:** Excellent cyclic life in harsh conditions (Very Long Life >12 years design life)
- ✓ **Gel Tech:** Premium thixotropic gel electrolyte with high thermal stability

15
YEARS

LONG LIFE DESIGN

* EUROBAT CLASSIFICATION: >12 Years (Very Long Life).

2
YEARS

WARRANTY

* Subject to charge and temperature parameters stipulated in this datasheet.

MAIN APPLICATIONS



SOLAR/WIND ENERGY SYSTEMS



ELECTRICAL SUBSTATIONS



TELECOMMUNICATIONS AND BASE STATIONS



UPS AND DATA CENTERS

QUALITY STANDARDS

CE CERTIFIED

ISO 9001 / 14001

IEC61427

IEC 60896-21/22

YD/T1360

BS6290 part 4

GRAPHICS (25°C)

Constant Discharge Ratings (A) at 25°C

F.V / Time	30MIN	1HR	3HR	5HR	10HR	20HR
1.80 V	321A	219A	98.9A	69.1A	40A	21A
1.75 V	334A	226A	102A	71.2A	40.3A	21.1A
1.70 V	342A	230A	103A	71.7A	40.5A	21.3A
1.65 V	353A	236A	103A	72.2A	40.6A	21.3A
1.60 V	360A	240A	104A	72.6A	40.7A	21.4A


Constant Discharge Ratings (W) at 25°C

F.V / Time	30MIN	1HR	3HR	5HR	10HR	20HR
1.80 V	601W	416W	194W	136W	79.6W	42W
1.75 V	624W	429W	200W	140W	80.2W	42.3W
1.70 V	640W	438W	201W	141W	80.6W	42.5W
1.65 V	660W	449W	203W	142W	80.9W	42.7W
1.60 V	673W	456W	204W	143W	81W	42.8W

CHARGE CHARACTERISTICS




DISCHARGE CHARACTERISTIC 25oC

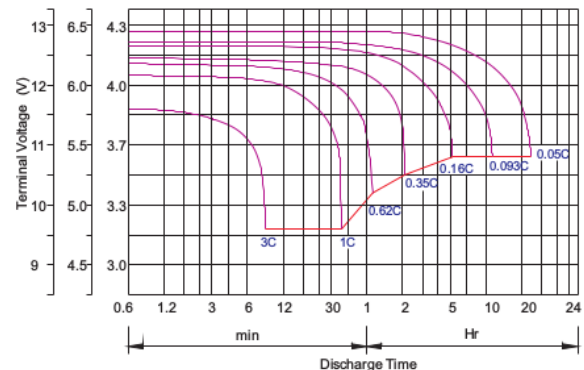

SELF DISCHARGE CHARACTERISTICS



LIFE CHARACTERISTIC OF CYCLIC USE

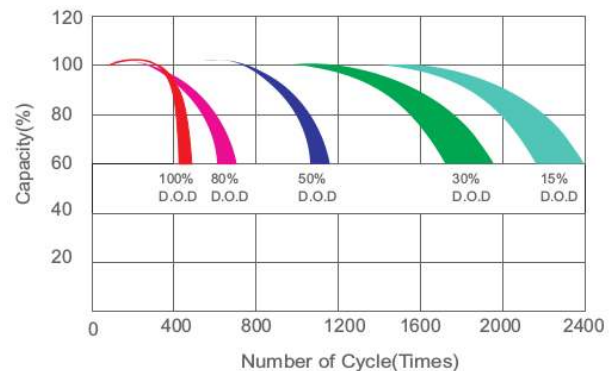

SPECIFICATIONS

Nominal Voltage	2 V
Capacity (25°C)	400 Ah (C10)
Energy	800 Wh
Cell number	1
Charge Voltage (25°C)	Cycle use: 2.35-2.40V (-5mV/C) Float use: 2.25-2.29V (-3mV/C)
Max. Charge Current	80 A
Max. Discharge Current	2000 A
Internal Resistance	25 mΩ
Self Discharge	3 % of capacity per month at 20 °C
Capacity Affected by Temperature	40 °C: 102 %, 25 °C: 100 %, 0 °C: 85 %, -15 °C: 65 %

CONSTRUCTION

Component	Material
Container	ABS (Flame Retardant Optional)
Cover	ABS (Flame Retardant Optional)
Electrolyte	Sulphuric acid
Negative	Lead
Positive	Lead dioxide
Safety Valve	Rubber
Sealant	Epoxy Resin
Separator	Fibre Glass
Terminal	Copper

QUICK INSTALLATION GUIDE

To ensure optimal performance and maximize the lifespan of your **REKOSER RXG2-400** battery, follow these assembly and connection guidelines.

1. SPACE AND DIMENSION VERIFICATION

Before proceeding, ensure the receptacle or cabinet of your equipment complies with the unit's physical measurements:


Length: 210 mm

Width: 176 mm

Height: 330 mm

Total Height: 367 mm

Weight: 25.5 kg

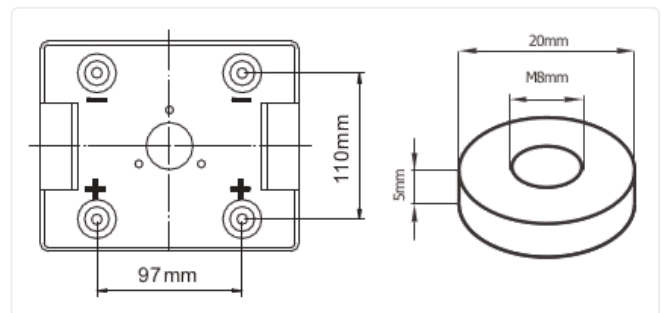

2. TERMINAL CONFIGURATION (F10)

Terminals: Ensure your system's connectors match the F10 type to prevent electrical arcing.

Polarity: Check the positive and negative markings on the battery before connecting, to prevent short circuits.

3. CHARGE PARAMETERS

Cycle use: 2.35-2.40V (-5mV/C)

Float use: 2.25-2.29V (-3mV/C)

Maximum Current: Do not exceed 80 A of charge.

4. SAFETY AND STORAGE

Maintenance: Sealed gel battery, maintenance-free and leak-proof.

Charging: Keep to the stated charge voltage: gel is sensitive to overcharging.

Cycling: Recharge fully after every discharge; never leave it discharged.

Storage: Store charged, in a cool and dry place, and recharge periodically.

NEARBY MODELS

RXG2-300 (2 V · 300 Ah) · **RXG2-600** (2 V · 600 Ah) · [See all RXG series models](#)

Specialized Technical Support
<https://rekoser.com> | +34 958 04 29 73